




IP Recorder

NVR-4308P8-H1



4000
IP SERIES

FUNCTIONS




COMPATIBILITY



KEY FEATURES

- 8 x Ethernet PoE - RJ-45 interface, 10/100 Mbit/s
- Video and audio channels: 8
- Supported protocols: ONVIF
- Recording speed up to 240 fps at 3840 x 2160
- Recorded stream size: 128 Mb/s in total from all cameras
- Internal HDDs mount: 1
- Monitor outputs: 2 (HDMI (4K UltraHD), VGA)
- Intelligent image analysis

DIMENSIONS

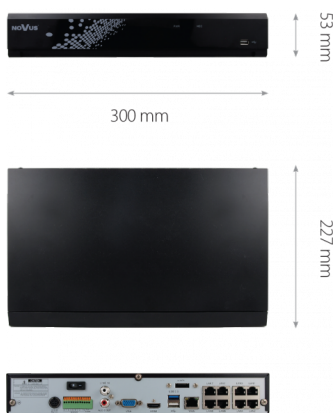

Video	
IP Cameras	8 channels at 3840 x 2160 resolution (video + audio)
Supported Resolution	max. 3840 x 2160 max. 2160 x 2160 for fisheye cameras
Compression	H.264, H.265
Monitor Output	main (split screen, full screen, sequence): 1 x VGA, 1 x HDMI (4K UltraHD) (up to 2 monitors simultaneously)
Dualstreaming Support	yes
Fisheye support	yes, 2000 IP series cameras
Audio	
Audio Output	1 x line-out (RCA) 1 x HDMI
Recording	
Recording Speed	240 fps (8 x 30 fps for 3840 x 2160 and lower)
Stream Size	128 Mb/s in total from all cameras
Recording Mode	time-lapse, triggered by: manual, alarm input, motion detection, intelligent image analysis functions
Prealarm/Postalarm	up to 3 s/up to 600 s
Display	
Display Speed	240 fps (8 x 30 fps)**
Playback	
Playback Speed	240 fps (8 x 30 fps) **
Recorded Data Search	by date/time, events, by image analysis events
Backup	
Backup Methods	DVD (option), USB port (HDD or Flash memory), network
Backup File Format	BMP, MP4, AVI, RF
Storage	
Internal storage	available mount: 1 x HDD 3.5" 8 TB SATA
Total Internal Capacity	8 TB
Alarm	
Internal Alarm Input/Output	8/1 relay type
System Reaction to Alarm Events	buzzer, e-mail, alarm output activation, screen message, recording activation, PTZ, cloud storage
Intelligent image analysis	
Supported functions	Tripwire, Zone entrance, Abandoned Object, Object Disappearance, Face Detection, Pedestrian Detection, Cross Counting
Network	
Network Interface	1 x Ethernet - RJ-45 interface, 10/100/1000 Mbit/s 8 x Ethernet PoE - RJ-45 interface, 10/100 Mbit/s
Network Protocols Support	HTTP, TCP/IP, IPv4, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, SMTP
PC/MAC Software	NMS, Internet Explorer, NHDR-5000 Viewer/Safari, NHDR-5000 Viewer
Smartphone Software	RxCamView (iPhone, Android)
Max. Number of Connections with NVR	3
Bandwidth	128 Mb/s in total to all client workstations
PTZ	
PTZ Functions	pan/tilt/zoom, preset commands, patterns
Auxiliary Interfaces	
USB Ports	2 x USB 3.0, 1 x USB 2.0
Operating system	
Operating System	Linux
OSD	languages: Polish, English, others
Control	PC mouse and IR remote controller (in-set included), network
System Diagnostic	automatic control of: HDDs, network, camera connection loss
Security	password protection
Installation parameters	
Dimensions (mm)	300 (W) x 53 (H) x 227 (D)
Weight	1.1 kg (without HDD)
Power Supply	48 VDC (100 ~ 240 VAC/48 VDC PSU in-set included)
Power Consumption	20 W (with 1 HDD) + 240 W PoE
Operating Temperature	-10°C ~ 45°C

* List of compatible HDD models and maximum of their capacities is available in section DOWNLOADABLE FILES.

** Available with dual streaming mode.

Support for intelligent image analysis works only with NOVUS IP 2000 series cameras